


## Not Equivalent - Better!

### FIRE SYSTEM CABLES

### SAVE YOURSELF TIME AND MONEY!

### NOBURN IS THE FASTEST FIRE CABLE TO PREPARE FOR TERMINATION.

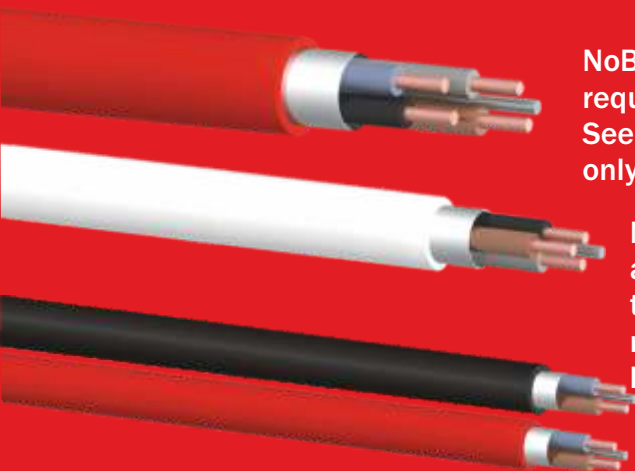

NoBurn Platinum is certified by LPCB & BASEC to fully meet the requirements of 'Standard' fire cable used with UK fire systems. See details of all standards below. Manufactured entirely and only in the UK.

NoBurn cable is produced using the latest technology, materials and equipment. Every detail from start to finish is recorded and traceable, a quality batch and test number is printed on every reel, and time and date of manufacture printed along the entire length of the cable.

NoBurn cable cores are twisted during manufacture to provide the highest level of data protection, ideal for long cable runs and analogue addressable fire systems.

#### No troublesome multiple sheaths to strip:-

- All in one - Easy strip outer sheath
- No separate foil
- No additional fibre wraps
- No mica tape on conductors
- No additional core separators to remove

NoBurn cable has superb working flexibility but stays where you put it, reduced installation time and costs.

#### Emergency Lighting Standard - BS 5266-1:2011



NoBurn Platinum is certified by LPCB and BASEC to meet twice the required minimum 1 hour duration of BS EN 50200:2006 by being approved to PH120 - a two hour duration.

**Be Safe - Insist on NoBurn for all Emergency Lighting Systems**



LPCB Ref. No. 682a/01



Licence No: 152/001

#### • Also suitable for

- |  |                |
|--|----------------|
| Voice Alarm Systems Standard                       | BS 5839-8:2013 |
| Voice Communication Standard                       | BS 5839-9:2013 |
| (Risk Assessment May Demand Mechanical Protection) |                |
| Irish Emergency Lighting Standard                  | IS 3217:2013   |
| Irish Fire Alarm System Standard                   | IS 3218:2013   |

### Features

- Easy to Install and Superb Working Flexibility
- Up to 12 Twists per metre for Data Protection
- Red, White, Black & Orange Outer Sheaths Available
- 1.0mm<sup>2</sup>, 1.5mm<sup>2</sup>, 2.5mm<sup>2</sup> & 4.0mm<sup>2</sup> Conductors
- 100m, 200m, 500m and Special Lengths Available
- Aluminium / Co-polymer Foil Screen
- Low Smoke & Zero Halogen
- Voltage Rating 300v/500v
- Suitable for Zone 1 and Zone 2 Hazardous Area use
- Suitable for Air Conditioning, Computer Control & Lift Doors where Low Smoke & Zero Halogen is required
- Supplied on Robust Black Plastic Reels - Clear Identification from Enhanced Fire Cable


#### Approved and Certified to meet

<b>BS 5839-1:2013 Clause 26.2d</b>	'Standard' Fire System Cable
<b>BS 7629-1:2008</b>	Fire Cable Standard
<b>BS EN 50200:2006+Annex E 30 mins</b>	• Fire, Mechanical Shock & Water - 30 mins @ 830°C (Water final 15 mins)
<b>BS EN 50200:2006 PH30, PH60 &amp; PH120</b>	• Fire & Mechanical Shock - total of 120 mins @ 830°C (MS every 5 mins)
<b>BS 6387:2013 Clause 6,7 &amp; 8 CWZ</b>	• C - Fire only for 180 mins (3 hours) @ 950°C W - Fire & Water for 30 mins @ 650°C (Water final 15 mins) Z - Fire & Mechanical Shock for 15 mins @ 950°C (MS every 30 seconds)
<b>BS EN 50267-2-1:1999</b>	Halogen Emission Standard
<b>BS EN 61034-2:2005</b>	Low Smoke Standard

# The Fastest Fire Cable to Install

Ventcroft NoBurn Platinum is available in a variety of multiple core combinations all with CPC (circuit protection conductor).

100m, 200m, 500m reels and other special lengths are available.

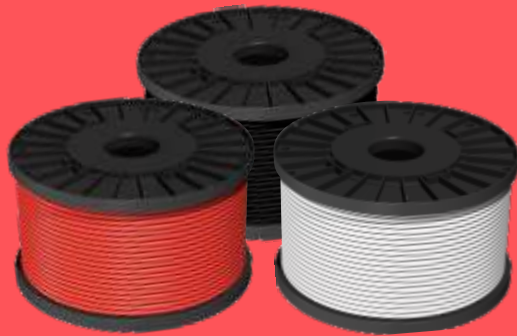

### Black Plastic Reels for Clear Identification from 'Enhanced' Cable

- Installer Safe and Easy Handling •
- Better Reeling and Damage Resistant •
- Weather and Moisture Resistant •

### Manufacturers Recommended Installation Guide Lines

Recommended metal clip spacing 300mm Horizontal  
400mm Vertical

The type, spacing and requirement of additional fixings when laid in Cable Trays is optional & relative to local risk assessment.

#### Installation Temperatures:

Minimum installation Temperature 0°C  
Maximum installation Temperature 70°C

#### Operating Temperature:

Minimum -40°C to Maximum +90°C.

The cable should not be flexed or bent when either the cable or operating temperature is below the recommended minimum or above the maximum recommended **installation** temperatures.

Minimum Bend Radius = 6 x Diameter

Plastic clips or ties must not be used as the sole means of support for fire cable.

### Specifications

LPCB & BASEC approved to	'Standard' Fire Cable Fire Resistance Standard Fire Resistance Standard Fire Resistance Standard Fire Resistance Standard Halogen Emission Standard Low Smoke Standard	BS 5839-1:2013 Clause 26.2d BS EN 50200:2006+Annex E 30 mins BS EN 50200:2006 PH30, PH60 & PH120 BS 7629-1:2008 BS 6387:2013 Clause 6, 7 & 8 CWZ BS EN 50267-2-1:1999 BS EN 61034-2:2005
Designed to comply to	Emergency Lighting Voice Alarm Systems Standard Voice Communication Standard (Risk Assessment May Demand Mechanical Protection)	BS 5266-1:2011 BS 5839-8:2013 BS 5839-9:2013
Materials	CPC (Earth) Conductors Core Installation Screening Outer Sheath	Tinned Annealed Copper Plain Annealed Copper Fire Resistant Silicone Aluminium Foil Low Smoke Halogen Free Thermoplastic
Working Voltage	Core to Core Core to CPC	500V 300V
Types	Outer Sheath Colours Number of Cores Inner Cores CSA	Red, White, Black or Orange 2, 3 & 4 Core 1.0, 1.5, 2.5 & 4.0mm <sup>2</sup> CSA
Resistance	1.0mm <sup>2</sup> CSA 1.5mm <sup>2</sup> CSA 2.5mm <sup>2</sup> CSA 4.0mm <sup>2</sup> CSA	18.1 Ohms / 1 Km 12.1 Ohms / 1 Km 7.41 Ohms / 1 Km 4.61 Ohms / 1 Km
Minimum Bend Radius	Radius = 6 x Diameter	
Operating Temp. Installation Temp.	Minimum/Maximum Minimum/Maximum	- 40°C to +90°C 0°C to +70°C
Voltage Drop (DC or Single Phase AC)	1.0mm <sup>2</sup> CSA 1.5mm <sup>2</sup> CSA 2.5mm <sup>2</sup> CSA 4.0mm <sup>2</sup> CSA	44 Ohms mV / A / m 29 Ohms mV / A / m 18 Ohms mV / A / m 11 Ohms mV / A / m
Approximate Overall Diameter	2 Core  3 Core  4 Core	1.0mm <sup>2</sup> / 7.35mm 1.5mm <sup>2</sup> / 7.60mm 2.5mm <sup>2</sup> / 9.00mm 4.0mm <sup>2</sup> / 10.90mm  1.0mm <sup>2</sup> / 7.95mm 1.5mm <sup>2</sup> / 8.75mm 2.5mm <sup>2</sup> / 9.50mm 4.0mm <sup>2</sup> / 12.50mm  1.0mm <sup>2</sup> / 8.20mm 1.5mm <sup>2</sup> / 9.00mm 2.5mm <sup>2</sup> / 11.40mm 4.0mm <sup>2</sup> / 13.75mm
Approximate Weights	2 Core with CPC  3 Core with CPC  4 Core with CPC	1.0mm <sup>2</sup> 8.0 Kg / 100 m 1.5mm <sup>2</sup> 9.5 Kg / 100 m 2.5mm <sup>2</sup> 14.1 Kg / 100 m 4.0mm <sup>2</sup> 20.0 Kg / 100 m  1.0mm <sup>2</sup> 9.5 Kg / 100 m 1.5mm <sup>2</sup> 12.9 Kg / 100 m 2.5mm <sup>2</sup> 19.1 Kg / 100 m 4.0mm <sup>2</sup> 25.0 Kg / 100 m  1.0mm <sup>2</sup> 10.9 Kg / 100 m 1.5mm <sup>2</sup> 14.5 Kg / 100 m 2.5mm <sup>2</sup> 22.2 Kg / 100 m 4.0mm <sup>2</sup> 31.0 Kg / 100 m
Current Rating (Current Ratings listed are at 30°C Refer to BS7671/EE Wiring Regulations for de-rating factor.)	Cable Clipped (DC or Single Phase AC)  Enclosed (DC or Single Phase AC)	1.0mm <sup>2</sup> 15A 1.5mm <sup>2</sup> 19.5A 2.5mm <sup>2</sup> 27A 4.0mm <sup>2</sup> 36A  1.0mm <sup>2</sup> 13A 1.5mm <sup>2</sup> 16.5A 2.5mm <sup>2</sup> 23A 4.0mm <sup>2</sup> 30A
Capacitance Rating	1.5mm <sup>2</sup> CSA 2 Core & CPC } 3 Core & CPC } 4 Core & CPC ~  2.5mm <sup>2</sup> CSA 2 Core & CPC } 3 Core & CPC } 4 Core & CPC ~	Core to Core - Average 70 pF/m Core to Screen - Average 130 pF/m  Core to Core - Average 75 pF/m Core to Screen - Average 150 pF/m  Core to Core - Average 80 pF/m Core to Screen - Average 145 pF/m  Core to Core - Average 85 pF/m Core to Screen - Average 165 pF/m
Warranty	Period Identification	10 Years from Date of Manufacture Date of Manufacture Marked On Cable

